


1260 Single Point, Aluminum NTEP 1:5000 Class III Single Cell



Available upon request

Picture is a representation of actual product

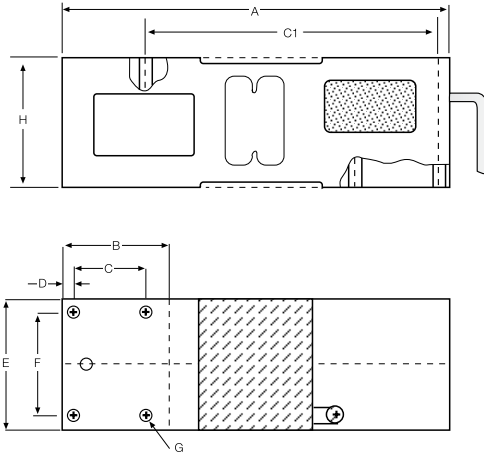

RATED CAPACITY	DIMENSIONS								H
	A	B	C	C1	D	E	F	G	
kg/mm 50-635	188	52	35	142	5.5	62.3	50	5/16-18 UNC-2B	62.3
lb/inches 110.2-1399.9	7.40	2.05	1.38	5.59	.22	2.45	1.97	5/16-18 UNC-2B	2.45

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V
Bridge Resistance: 350 ohms, nominal
Material/Finish: Anodized aluminum
Temperature: Compensated range 14°F to 104°F/-10°C to 40°C
Safe Overload: 200% of full scale at center loading point
Rated Excitation: 10V DC (15V maximum)
Total Error: 0.02% Full scale
Insulation Resistance: 5000 megohms
Seal Type: Environmentally sealed

Cable Length: 3 m/10'
Cable Color Code: Green..... + Excitation
 Black..... - Excitation
 Blue..... + Sense
 Brown..... - Sense
 Red..... + Signal
 White..... - Signal
Warranty: 1-year limited warranty
Max Platform size: 24" x 24"

1260 ORDER INFORMATION

Load Rating	Part #	Price
50 kg (110.2 lb)	40769.....	\$310.00
75 kg (165.4 lb)	40770.....	\$310.00
100 kg (220.5 lb)	40771.....	\$310.00
200 kg (440.9 lb)	40772.....	\$310.00
250 kg (551.2 lb)	40773.....	\$310.00
300 kg (661.4 lb)	40774.....	\$310.00
500 kg (1102.3 lb)	40775.....	\$310.00
635 kg (1399.9 lb)	40776.....	\$310.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 164) RL1260
HBM	(see page 247) PW16