





Dimensions

Picture is a representation of actual product

Rated Capacity	A	B	C	D	E	F	H	I	J	K	L	M	N	O
lb/in														
17-23 lb	5.94	5.71	3.07	3.46	3.82	4.09	5.23	2.46	4.66	1.73	2.77	3.38	3.64	3.82
kg/mm														
3 kg	151.0	145.0	78.1	87.8	97.00	103.8	133.00	62.7	118.6	44.00	70.6	86.0	92.6	97.2

Order Information

Load Rating		Part#	Est. Weight	Price
17 lb	7.7 kg	131953	4 lb	Consult
23 lb	10.4 kg	131954	4 lb	Consult
6.6 lb	3 kg	131952	4 lb	Consult

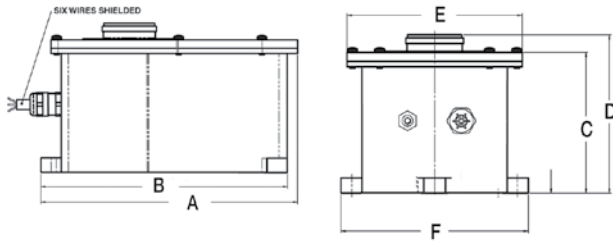

Specifications

- Full Scale Output:**
2.0 (± 0.3) mV/V
- Output Resistance:**
350 (± 3) ohms
- Input Resistance:**
415 (± 15) ohms
- Material/Finish:**
Stainless steel
- Temperature:**
Compensated range
14°F to 104°F (-10°C to 40°C)
Operating range
-40°F to 150°F (-40°C to 65°C)
- Safe Overload:**
160% full scale
- Rated Excitation:**
5-10 VDC
- Combined Error:**
0.05% full scale
- Insulation Resistance:**
2,000 megohms
- Seal Type:**
Environmentally sealed
- Cable Length:**
6 m PVC jacket
- Cable Color Code:**
Green + Excitation
Black - Excitation
White + Signal
Red - Signal
Blue + Sense
Brown - Sense
- Warranty:**
One-year limited warranty