

PC7

Stainless Steel, Hermetically Sealed, IP69K




Dimensions

Picture is a representation of actual product

Rated Capacity	H	H1	L	L1	L2	L3	L4	W	W1	T
kg/in										
100-500	2.88	1.00	5.91	3.41	2.92	1.50	0.63	1.50	1.00	M8
lb/mm										
220.5-1,102.5	73.00	25.4	150.00	86.5	74.00	38.00	16.00	38.1	25.4	M8

Order Information

Load Rating		Part#	Est. Weight	Price
100 kg	220.5lb	161719	6lb	Consult
250 kg	55.13lb	161720	6lb	Consult
500 kg	1,102.5lb	161721	6lb	Consult

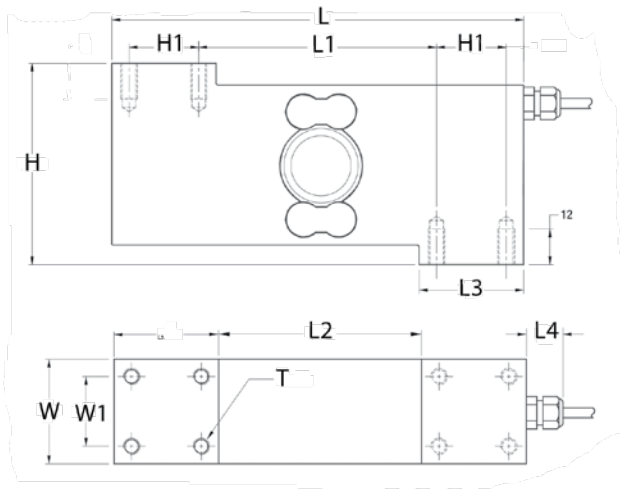

Interchangeable Products

VPG TEDEA-HUNTLEIGH®

1510 page 358

Specifications

Full Scale Output:

2mV/V ±5%

Output Resistance:

350 (± 10) ohms

Input Resistance:

380 (± 20) ohms

Capacity:

100 kg, 250 kg and 500 kg

Material/Finish:

Stainless steel construction with electro-polished finish

Seal Type:

Hermetically sealed, IP69K

Safe Overload:

150%

Rated Excitation:

5-15 VDC

Insulation Resistance:

5,000 megohms

Temperature

Compensated range
14°F to 104°F (-10°C to 40°C)
Operating range
-40°F to 150°F (-40°C to 65°C)

Max Platform Size:

Up to 600 mm x 600 mm

Cable Length:

3 m (9.9ft)

Cable Color Code:

Green+ Excitation
Black.....- Excitation
White+ Signal
Red- Signal
Blue+ Sense
Brown- Sense
Yellow Shield

Warranty:

One-year limited warranty

Approvals:

