


▶ CI-40

▶ **SINGLE POINT**

▶ **Aluminum**
NTEP 1:5,000 Class ■ Single Cell

Coti, Inc. • 122 Export Circle • Huntsville, Alabama 35806 • Toll Free: 1-888-268-4462 • Fax: 256-859-5024 • www.cotiinc.com

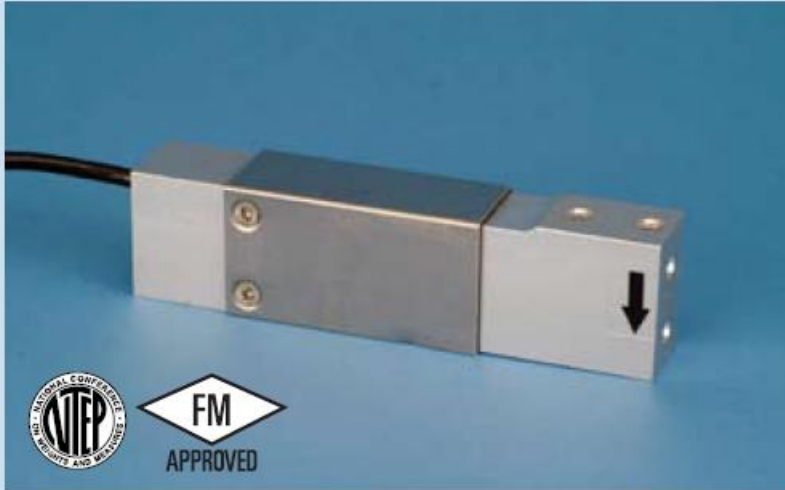


CI-40 ORDER INFORMATION DISCOUNT C SUGGESTED LIST PRICE

- * 5 kg
- * 7 kg
- 10 kg
- 15 kg
- 20 kg
- 30 kg
- 50 kg
- 75 kg
- 100 kg
- *NON-NTEP

INTERCHANGEABLE PRODUCTS

Rice Lake Weighing Systems.....	RL1040
Rice Lake Weighing Systems.....	RL1042
Revere Transducers.....	642
Tedea-Huntleigh.....	1040
Tedea-Huntleigh.....	1042
HBM.....	SP4
Celtron.....	LOC

Main Dimensions and Accessories

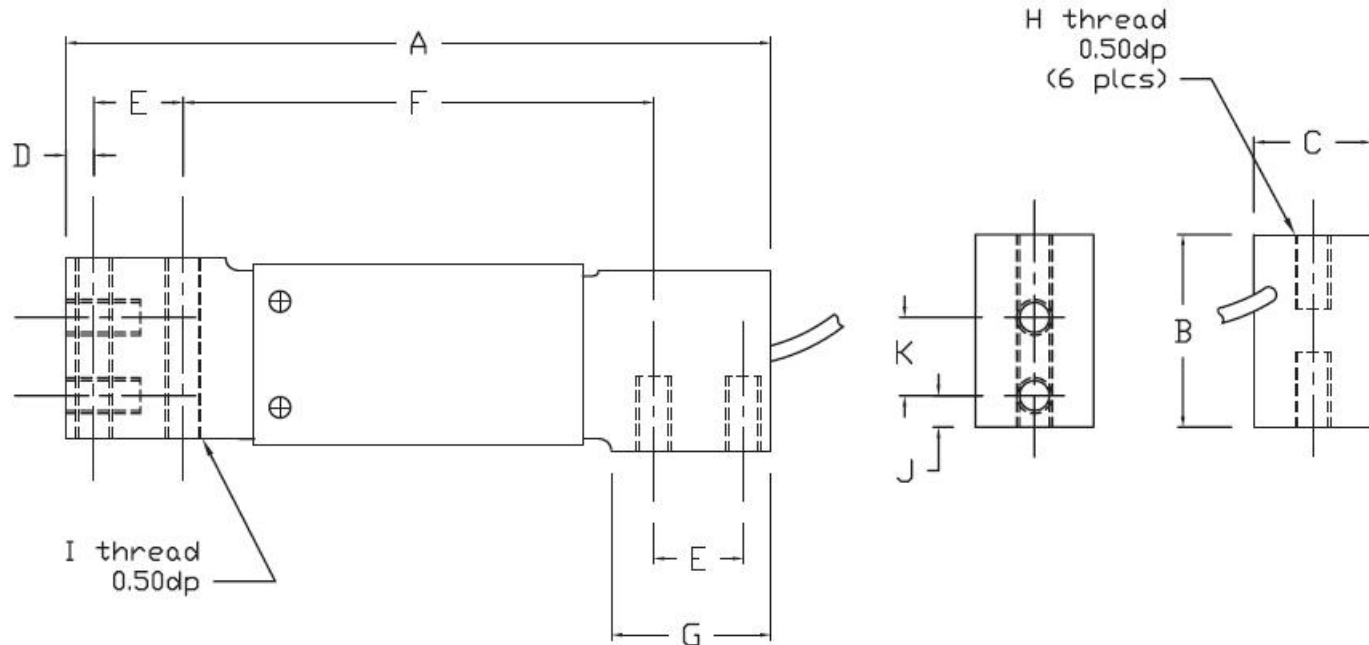

RATED CAPACITY	DIMENSIONS										
	A	B	C	D	E	F	G	H	I	J	K
5-100KG	5.91	1.57	1.03	0.24	0.75	3.94	1.339	1/4-20UNC	1/4-28UNF	0.35	0.75

▶ **SPECIFICATIONS** ◀

Rated Output (mV/V)	2,00	Bridge Resistance	350 Ohms
Nonlinearity	+/- 0.02% FS	Insulation Resistance	5000 Megohms
Hysteresis	+/- 0.02% FS	Excitation Voltage	10V AC/DC (15V Max)
Repeatability	+/- 0.01% FS	Compensated Temperature Range	-10°C - +40°C
Creep (30 minutes)	+/- 0.02% FS	Operating Temperature Range	-20°C - +60°C
Zero Balance	+/- 1.00% FS	Safe Overload	150% FS
Temperature Effect on Zero	+/- 0.02% FS/10° C	Cable Length	10' 6 Conductor Cable
Temperature Effect on Output	+/- 0.02% FS/10° C	Seal Type	Environmentally-Sealed, Potted, IP67
Cable Color Code	Input	Output	Sense Leads
	Green +Excitation	Red +Signal	Blue +Sense
	Black -Excitation	White -Signal	Brown -Sense