


RLPCBC-60

Single Point, Stainless Steel NTEP Certified 1:5000 Class III Single Cell, Hermetically Sealed IP69K



Picture is a representation of actual product

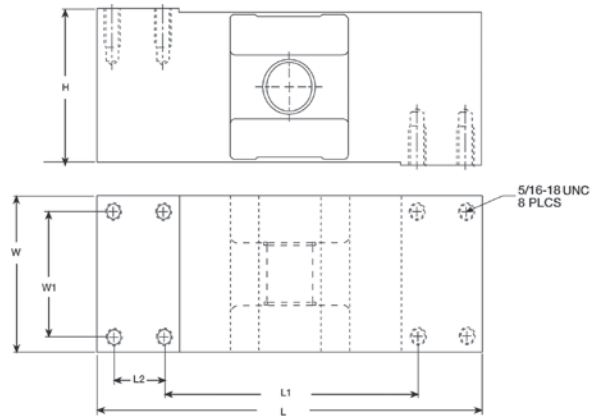

Specifications

Full Scale Output:
2 mv/v

Output Resistance:
960 (± 50) ohms

Input Resistance:
1,100 (± 50) ohms

Material/Finish:
Stainless steel

Temperature:
Compensated range:
14° F to 104° F / -10° C to 40° C
Operating range
-40° F to 150° F / -40° C to 65° C

Safe Overload:
200% full scale

Safe Sideload:
100% full scale

Rated Excitation:
5-10 VDC

Total Error:
0.020% full scale

Insulation Resistance:
5,000 megohms

Seal Type:
Hermetically sealed, IP69K

Cable Length:
10 ft (3 m)

Cable Diameter:
0.196 polyurethane jacket

Cable Color Code:
Green + Excitation
Black - Excitation
White + Signal
Red - Signal
Yellow Shield
Blue + Sense
Brown - Sense

Max Platform Size:
24 x 24 in

Warranty:
Two-year limited warranty

Approvals:



Dimensions

RATED CAPACITY	L	L1	L2	W	W1	H
lb/inches						
110.3-2,205	7.50	4.21	1.38	2.90	1.97	2.90
kg/mm						
50-1,000	190.5	107.00	35.00	73.7	50.00	73.7

Order Information

LOAD RATING		PART #	EST. SHIPPING WEIGHT	PRICE
50 kg	(110.3 lb)	87022	12 lb	Consult
100 kg	(220.5 lb)	87023	12 lb	Consult
250 kg	(551.3 lb)	87024	13 lb	Consult
500 kg	(1,102.5 lb)	87025	13 lb	Consult
1,000 kg	(2,205 lb)	87026	15 lb	Consult