


RLPWM12

Single Point, Aluminum IP67, NTEP Certified 1:5000 Class III Single Cell



Picture is a representation of actual product

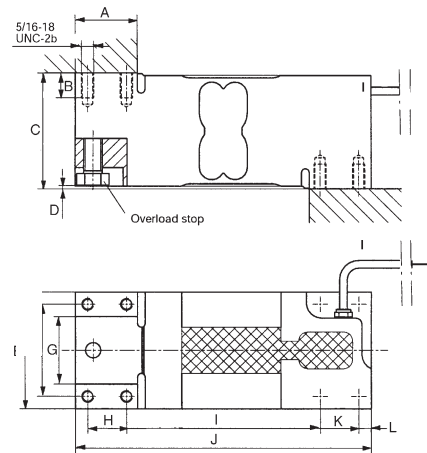

Specifications

Full Scale Output: 2.0mV/V Output Resistance: 330-450 ohms, nominal Input Resistance: 300-500 ohms Material/Finish: Aluminum Temperature: Compensated temperature range 14°F to 104°F/-10°C to 40°C Operating range -40°F to 150°F/-40°C to 65°C	Safe Overload: 150% full scale Rated Excitation: 5-10 VDC (15 V maximum) Total Error: 0.02% full scale Insulation Resistance: 1,000 megohms Seal Type: Environmentally sealed, IP67 Cable Length: 3.1 m (10 ft)	Cable Diameter: 0.190/PVC jacket Cable Color Code: Green + Excitation Black - Excitation Blue + Sense Brown - Sense Red + Signal White - Signal Warranty: Two-year limited warranty	Max Platform Size: 30 x 30 in Approvals:
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------

Dimensions

RATED CAPACITY	A	B	C	D	E	F	H	I	J	K	L
lb/inches											
110.2-2,205.0	1.57	0.62	2.95	0.05	2.99	2.36	0.98	4.92	7.51	0.98	0.31
kg/mm											
50-1,000	40.00	16.00	75.00	1.5	76.00	60.00	25.00	125.00	191.00	25.00	8.00

Order Information

LOAD RATING	PART #	EST. SHIPPING WEIGHT	PRICE
50 kg (110.2 lb)	91674	6 lb	Consult
75 kg (165.4 lb)	91675	6 lb	Consult
100 kg (220.5 lb)	91676	6 lb	Consult
150 kg (330.7 lb)	91677	6 lb	Consult
200 kg (440.9 lb)	91678	6 lb	Consult
250 kg (551.2 lb)	91679	6 lb	Consult
300 kg (661.4 lb)	91680	6 lb	Consult
500 kg (1,102.3 lb)	91681	6 lb	Consult
635 kg (1,400.1 lb)	91682	6 lb	Consult
1,000 kg (2,205.0 lb)	91683	6 lb	Consult

Interchangeable Products

MANUFACTURER	MODEL	PAGE #
HBM®	PW12*	252
VPG Tedeo-Huntleigh®	1250	346
Rice Lake Weighing Systems	RL1250	183

*Color code is different