

65058S

Stainless Steel, Welded-seal, NTEP Certified 1:10,000 Class III Multiple Cell, IP67




Dimensions

Picture is a representation of actual product

Rated Capacity	A1	A2	B	C	D	F	G	H	J	K	L
lb/in											
20,000-25,000	1.69	1.94	7.75	6.50	1.70	0.68	1.38	0.75	0.90	1.63	1/4-18 NPT
40,000	1.94	2.44	10.25	8.50	2.10	0.81	1.93	1.00	1.12	2.00	1/4-18 NPT
50,000-75,000	2.44	2.94	10.25	8.50	2.65	1.06	1.93	1.00	1.37	2.54	1/2-14 NPT
100,000	2.44	3.44	10.25	8.50	2.65	1.06	1.93	1.00	1.37	2.54	1/2-14 NPT
125,000	2.90	3.86	15.25	12.75	3.43	1.62	3.13	1.50	1.80	3.30	1/2-14 NPT
kg/mm											
9,072.0-11,340.0	43.0	49.3	196.9	165.1	43.2	17.3	35.1	19.1	22.9	41.4	1/4-18 NPT
34,020.0	62.0	74.7	260.4	216.0	67.3	27.0	49.0	25.4	34.8	64.5	1/2-14 NPT
45,360.0	62.0	87.4	260.4	216.0	67.3	27.0	49.0	25.4	34.8	64.5	1/2-14 NPT
56,699.1	73.66	98.04	387.35	323.85	87.12	41.15	79.50	38.10	45.72	83.82	1/2-14 NPT

Order Information

Load Rating	Part#	Est. Weight	Price
35 ft Cable			
20,000 lb		9,072 kg	45475
25,000 lb		11,339.8 kg	45476
40,000 lb		18,143.7 kg	45477
50,000 lb		22,679.6 kg	45478
60,000 lb		27,215.3 kg	45479
75,000 lb		34,019.4 kg	45480
100,000 lb		45,359.2 kg	45481
125,000 lb		56,699 kg	45482
60 ft Cable			
75,000 lb		34,019.4 kg	48698

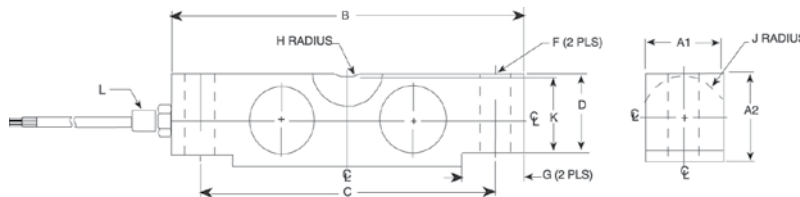

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS
RL75060S page 154

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS
2100 HE page 40
 RICE LAKE WEIGHING SYSTEMS
MVS page 98

Specifications

Full Scale Output:
3.0 mV/V

Output Resistance:
699-707 ohms

Input Resistance:
686-714 ohms

Material/Finish:
Stainless steel

Temperature:
Compensated range
14° F to 104° F (-10° C to 40° C)
Operating range
-40° F to 150° F (-40° C to 65° C)

Manufacturer Model Number:
65058SXX-1000W

Safe Overload:
150% full scale

Safe Sideload:
100% full scale

Rated Excitation:
5-10 VDC (15 V maximum)

Nonlinearity:
0.03% full scale

Hysteresis:
0.02% full scale

Insulation Resistance:
1,000 megohms

Seal Type:
Welded-seal, IP67

Cable Length:
35 ft (10.6 m)

Cable Diameter:
0.200 up to 25,000 lb,
0.305 between 40,000 lb-100,000 lb
polyurethane jacket

Cable Coloring:
 Red + Excitation
 Black - Excitation
 Green + Signal
 White - Signal

Warranty:
One-year limited warranty

