


Model 9320 Hand Held Battery Powered Indicator

- TEDS Plug & Play Ready
- 7 1/2 digital bipolar LCD display
- Dual range with unit labels
- Environmentally sealed
- Peak/valley hold
- Display hold
- Gross/net
- 25 Hz selectable update rate
- Shunt cal
- Power save mode
- mV/V Calibration

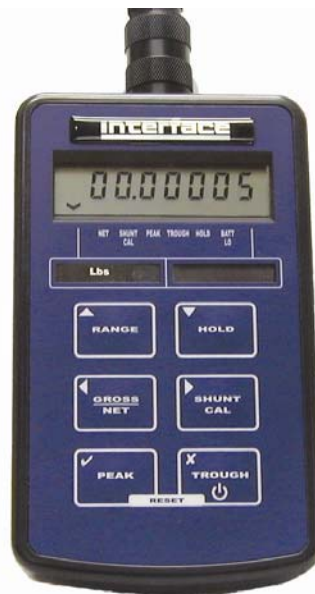

OPTIONS

Provides streaming ASCII for print, remote display and logging.
Order part # CAL-9320 RS232 Output

SPECIFICATIONS

ELECTRICAL	
Excitation Voltage	5 VDC
Current	59 mA
PERFORMANCE	
Maximum Display Counts	+9999999
Internal Resolution	24 bit
Signal Input Range	5 mV/V
Readings Per Second	to 25 selectable
Nonlinearity	0.005% FS
ENVIRONMENTAL	
Operating Temperature	14 to 122°F -10 to 50°C
Enclosure	Sealed IP65/NEMA 4X (when mating plug fitted)
POWER	
Power	2 x AA alkaline batteries
Battery Life	45 hrs (450 hrs in low power mode)
MECHANICAL	
Size	3.5" W x 6.0" H x 1.3" D 90mm x 152mm x 34mm
Weight	0.5 lb (250 g)
Display	7 1/2 digit LCD display, 8.8 mm digits