


▶ CI-1130

▶ SINGLE POINT

▶ STAINLESS STEEL

Coti, Inc. • 122 Export Circle • Huntsville, Alabama 35806 • Toll Free: 1-888-268-4462 • Fax: 256-859-5024 • www.cotiinc.com

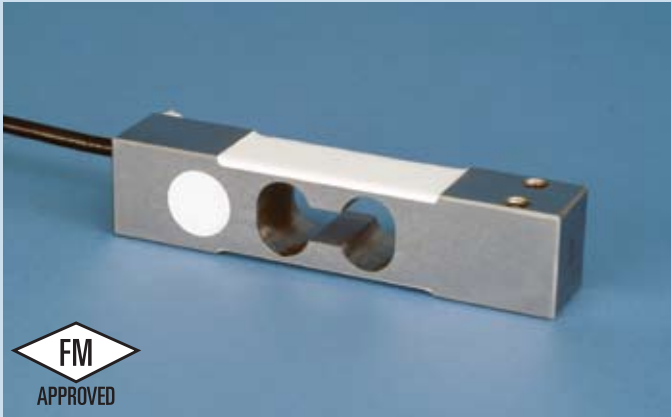


CI-1130 ORDER INFORMATION DISCOUNT C SUGGESTED LIST PRICE

- 7.5 Kg
- 15 Kg
- 30 Kg
- 50 Kg
- 100 Kg

INTERCHANGEABLE PRODUCTS

Tedea-Huntleigh.....	1130
Weigh-Tronix	MK29

Main Dimensions and Accessories

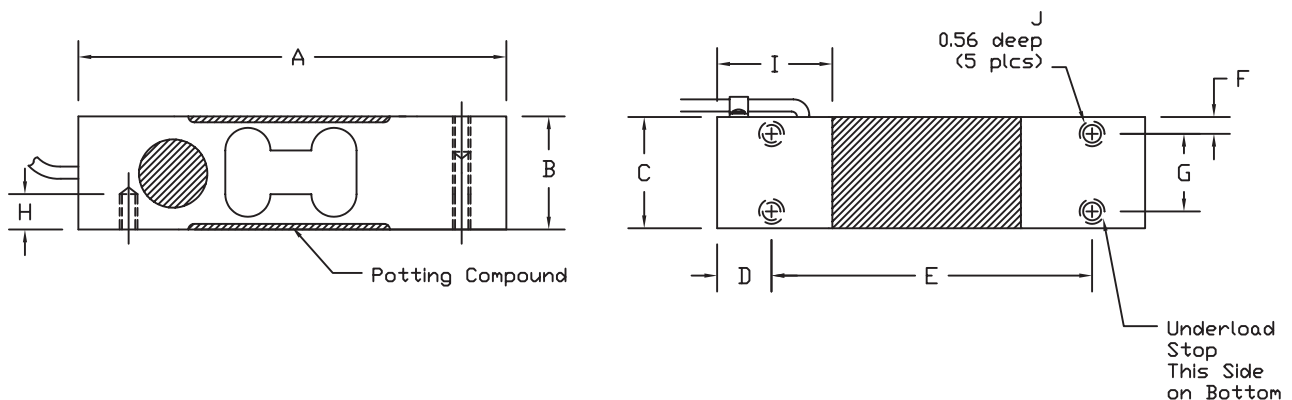

RATED CAPACITY	DIMENSIONS												
	A	B	C	D	E	F	G	H	I	J			
7.5-100KG	5.31	1.18	0.98	0.57	4.17	0.19	0.59	0.56	1.37	1/4-20UNC			

▶ SPECIFICATIONS ◀

Rated Output (mV/V)	2.00	Bridge Resistance	350
Nonlinearity	+/- 0.02% FS	Insulation Resistance	5000 Megohms
Hysteresis	+/- 0.02% FS	Excitation Voltage	10V AC/DC (15V Max)
Repeatability	+/- 0.01% FS	Compensated Temperature Range	-10°C - +50°C
Creep (30 minutes)	+/- 0.02% FS	Operating Temperature Range	-20°C - +60°C
Zero Balance	+/- 1.00% FS	Safe Overload	150% FS
Temperature Effect on Zero	+/- 0.02% FS/10° C	Cable Length	10' Standard Cable
Temperature Effect on Output	+/- 0.02% FS/10° C	Seal Type	Environmentally-Sealed, IP67
Cable Color Code	Input	Output	
	Green +Excitation	White +Signal	
	Black -Excitation	Red -Signal	